

SOM304D3

Features

- Vortex86DX3 1GHz
- Single and Dual Core Available
- Onboard 2GB DDR3
- 2x PCIe, 1x ISA, 1x SATA, 4x USB
- Operating in -20°C to +70°C
- EtherCAT Support



Specifications

CPU	DM&P SoC CPU Vortex86DX3 1GHz, L1:16KB -Cache, 16KB D-Cache, L2 Cache: 256KB				
RAM	1/2GB DDR3 Onboard				
BIOS	AMI BIOS				
Watchdog Timer	Software programmable from 30.5 u sec. to 512 sec. x 2sets				
Display	Integrated 2D VGA chip with dual display support (VGA+TFT-LCD)				
	VGA: Maximum resolution up to 1920 x 1080 @60Hz				
	TFT-LCD: Maximum resolution up to 1024 x 768 @60Hz				
LAN	Integrated 10/100Mbps Ethernet				
I/O Interface	PCIe (Ver1.1) x2 ISA (16-bit) x1 SATA (Ver1.0) x1 USB (Ver2.0) x4 HD Audio x1 PS/2 Keyboard x1 PS/2 Mouse x1				
I/O for User's Definition	Port	Function			
	P0	GPIO-P0	COM5	SPI	IDE
	P1	GPIO-P1	COM6		
	P2	GPIO-P2	COM7		
	P3	GPIO-P3	COM8	I ² C	
	P4	GPIO-P4	COM1		
	P5	GPIO-P5	COM2	PWM	
	P6	GPIO-P6	COM3	SD	
	P7	GPIO-P7	COM4		
	P8	GPIO-P8	COM9	PRINTER	
	P9	GPIO-P9			
Power Requirement	Single Voltage +5V @1300mA (Typical)				
Operating Temperature	-20°C - +70°C				
Operating Systems	Free DOS DOS6.22 PCDOS 7.1 DR-DOS x-DOS OS/2 Windows 7 Windows Embedded Standard 7				
	Windows Embedded Compact 7 Windows Embedded CE6.0 Windows XP Professional Windows XP Embedded				
	POS Ready(WePOS) Embedded Linux QNX VxWorks FreeBSD				
Dimension	70 x 70 x 10.5mm (Without cover)				
Weight	25g				

Ordering Information

PART NO.	CPU* (MHz)	DRAM (DDR3)	Storage	Display	LAN	USB (Ver. 2.0)	PCIe	ISA	HD Audio	Keyboard	Mouse
SOM304D374EINE1-HS	1GHz	1GB	SATA	VGA	1	4	2	1	1	1	1
				LCD							
SOM304D375EINE1-HS	1GHz	2GB	SATA	VGA	1	4	2	1	1	1	1
				LCD							

*Single and dual core are available

SOM304D3




JTAG
(For ICOP
Use only

TOP VIEW




BOTTOM VIEW

Carrier Boards for Function Test

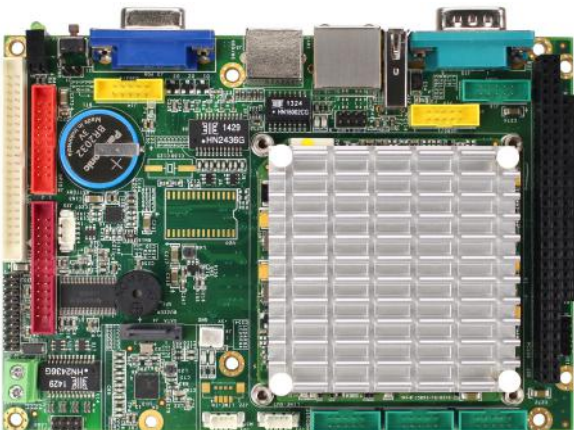

VDX3-6726 (TOP VIEW)

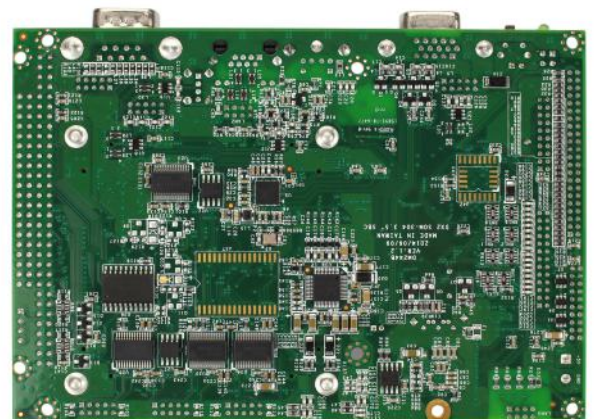

VDX3-6726 (BOTTOM VIEW)



VDX3-6724 (TOP VIEW)



VDX3-6724 (BOTTOM VIEW)